


凌科自动化



**MR**

10



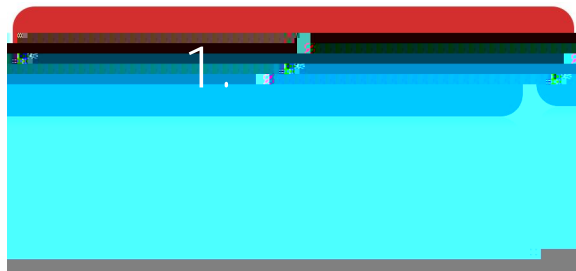

1.

1

2

3

4

1.2


1.3

V1.0	2021.11.03	

1.4



# 2.1

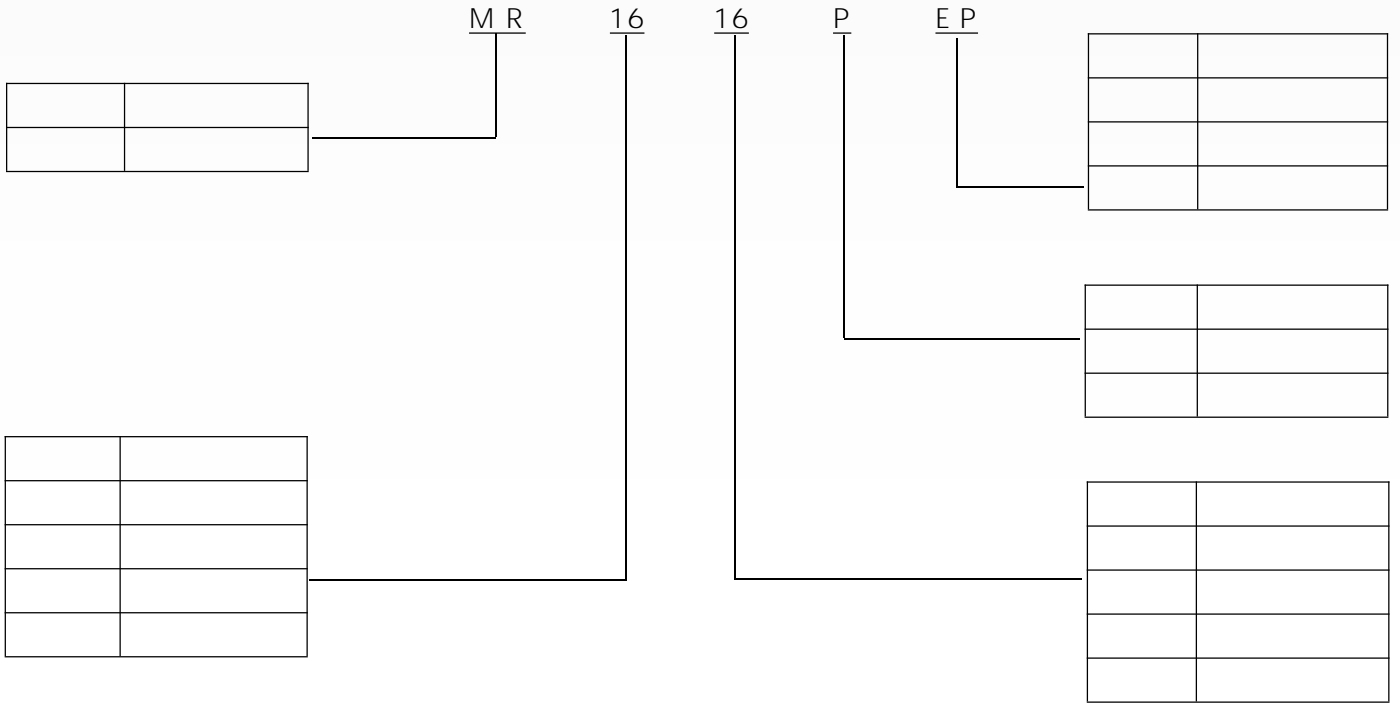

## 2.2 MR-EP

### 2.2.1DI




2

### 2.2.2DQ



3 MOSFET

### 2.2.3 Ethernet/IP









3.


3.1

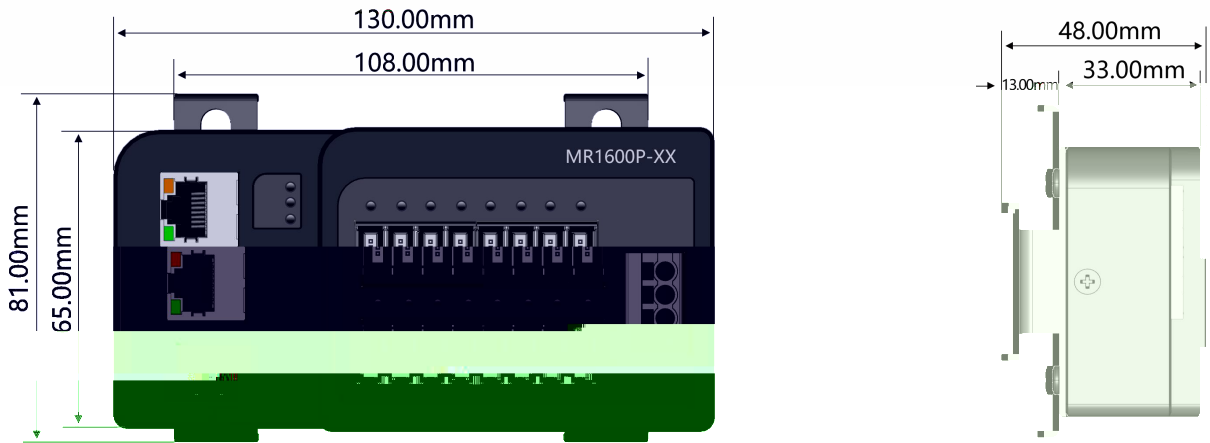


1 130\*81 W/H mm

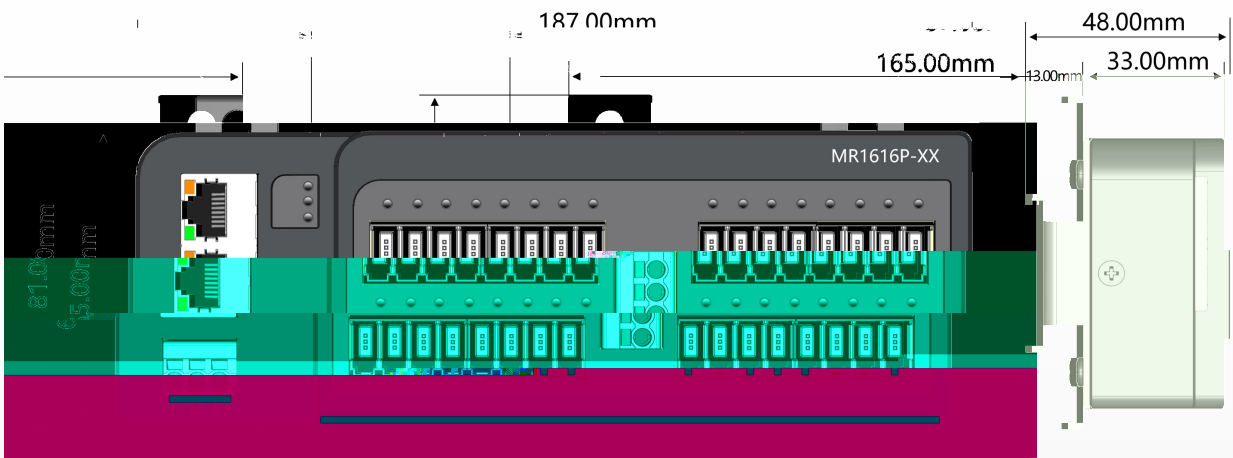

2 187\*81 W/H mm

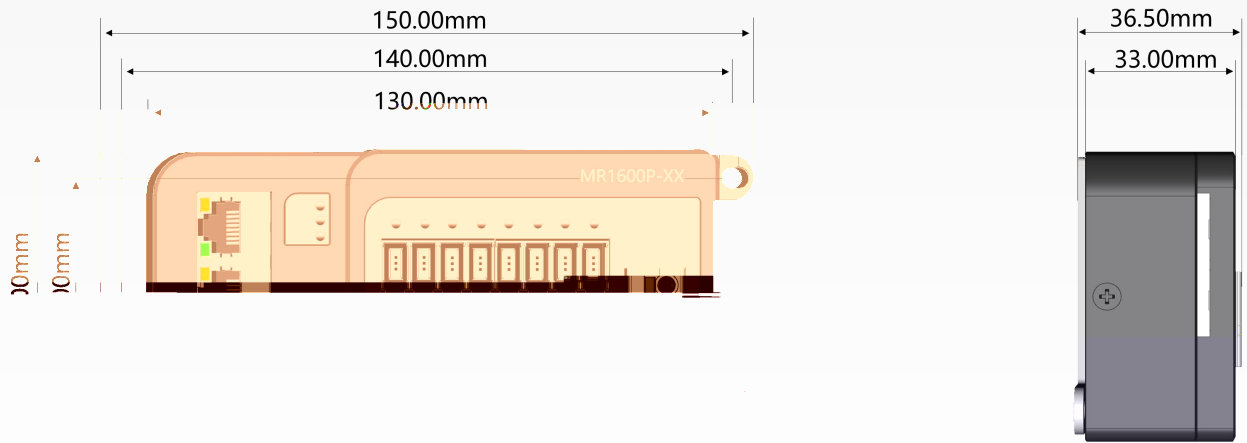


3 150 \*65 W/H mm

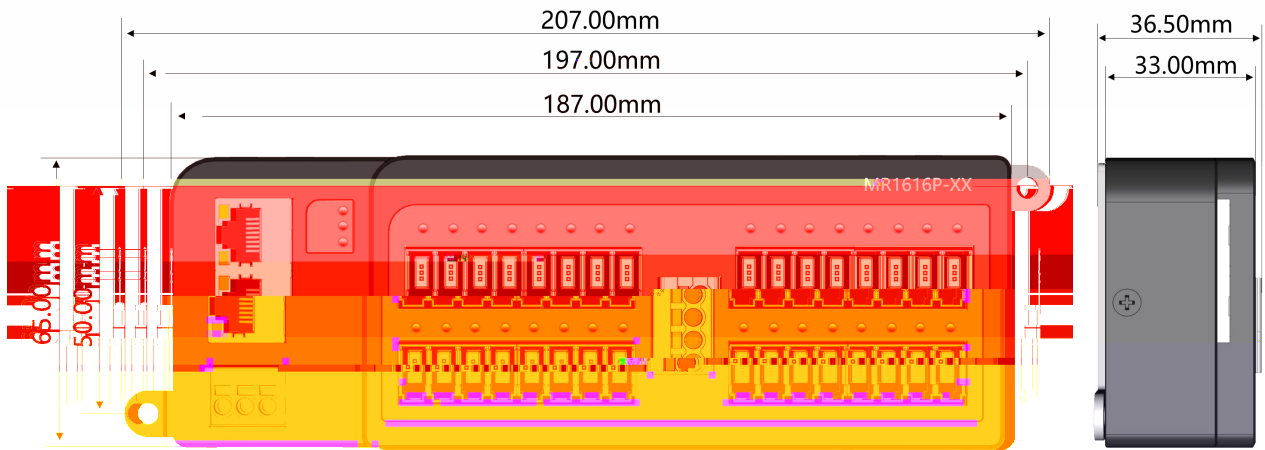

4 1--207 \*65 W/H mm

### 3.2

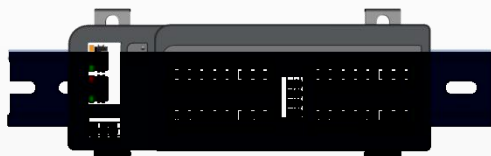

5 DIN




6




4.



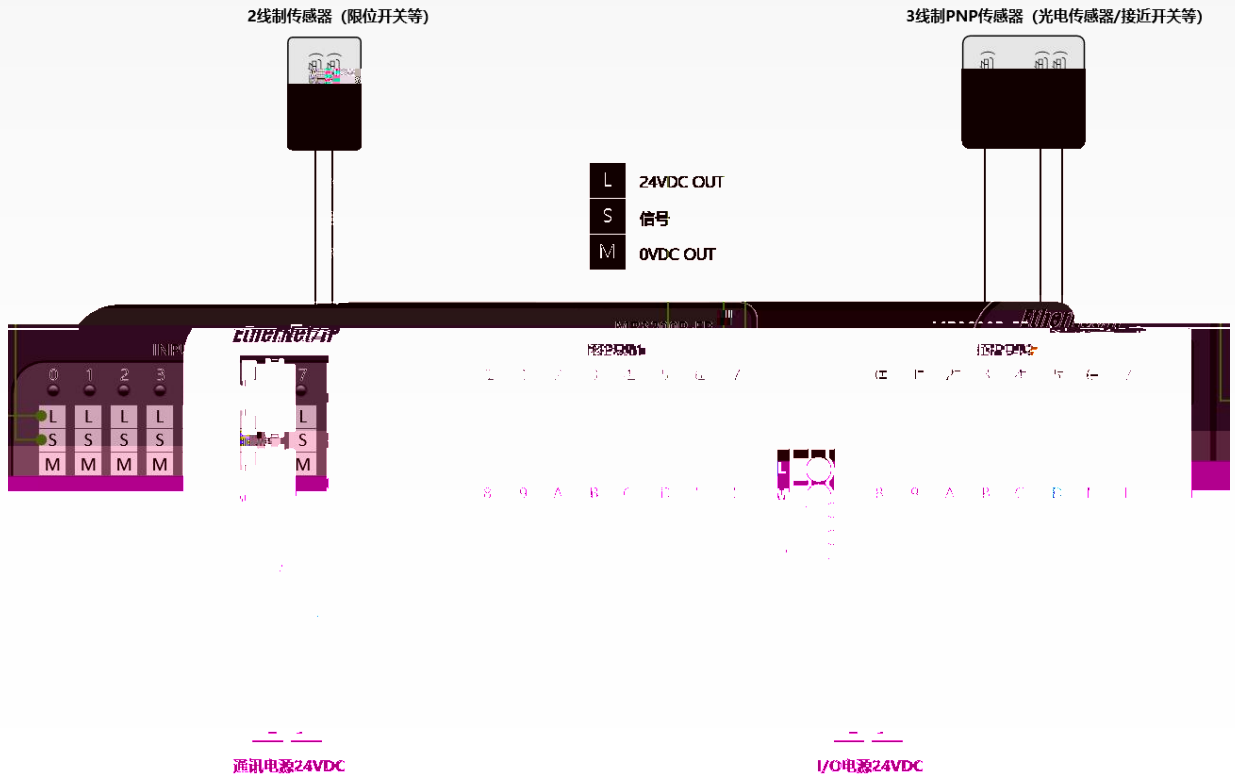


32 PNP

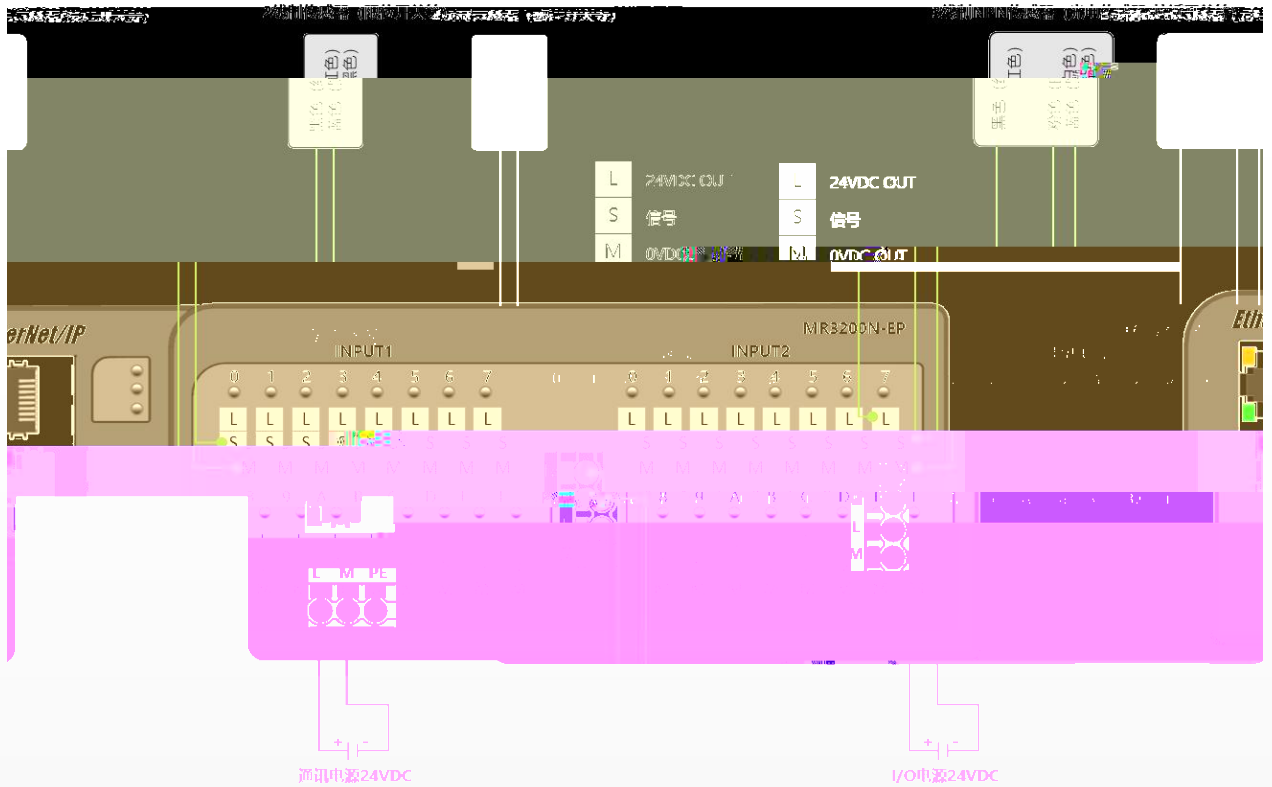


32 NPN



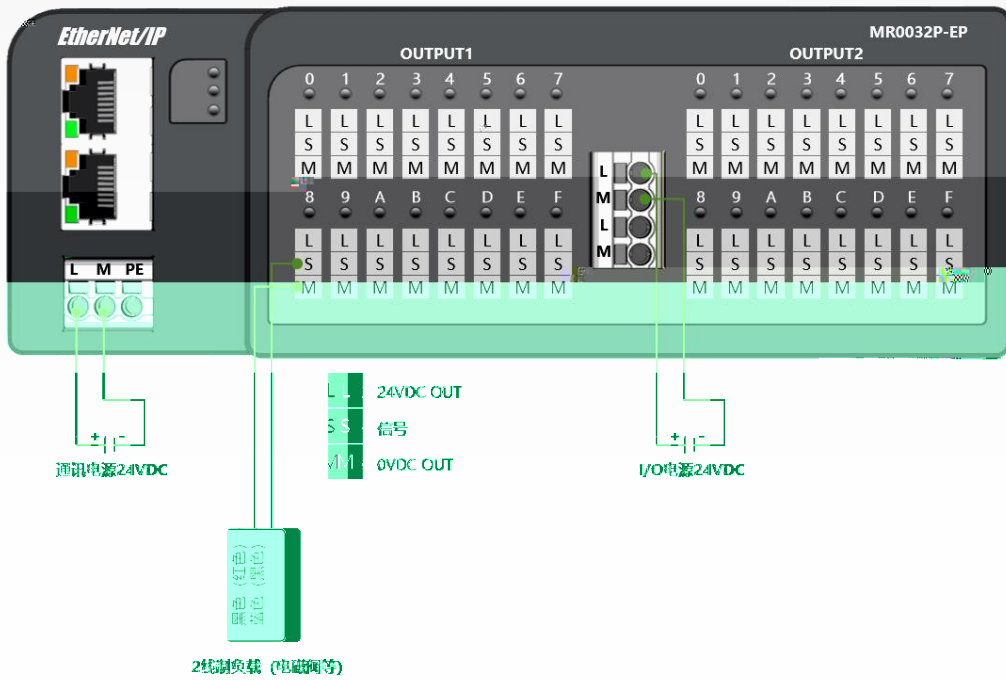


32 PNP

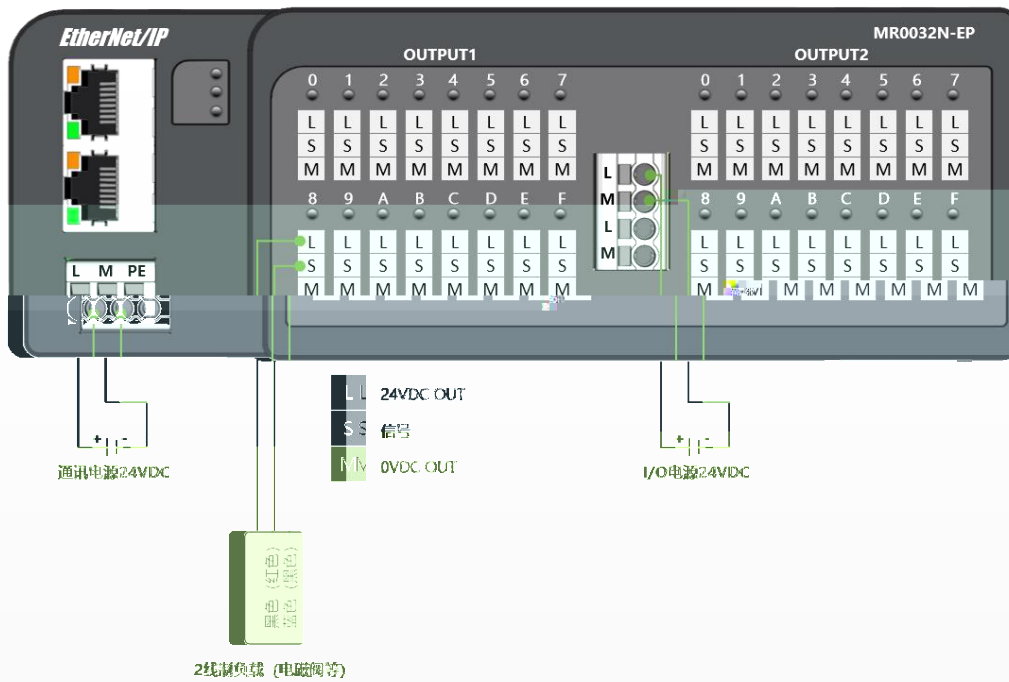

32 NPN




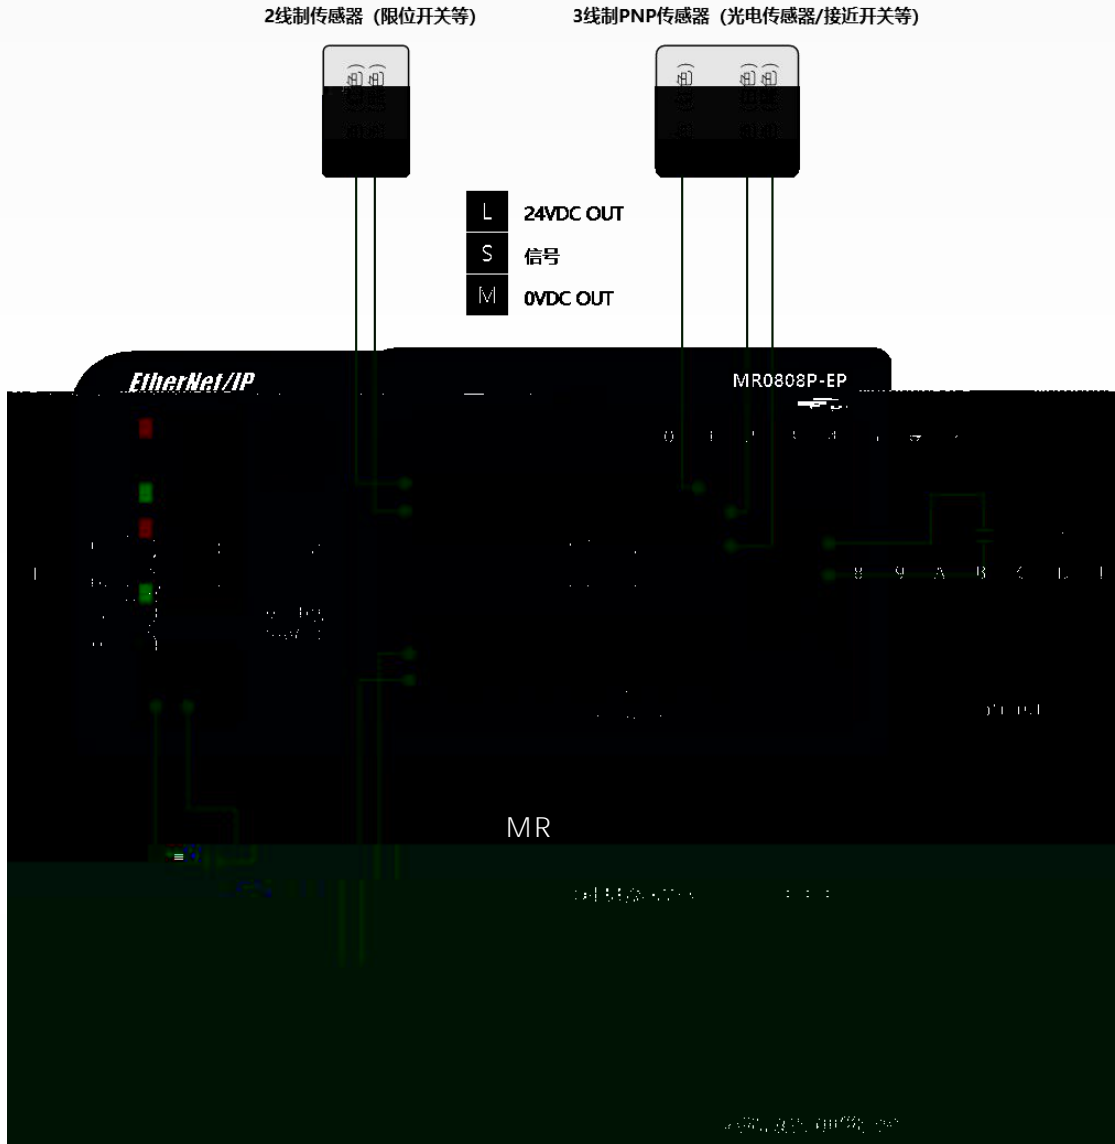


8 8 PNP

2线制传感器 (限位开关等)

3线制NPN传感器 (接近开关、光电开关等)

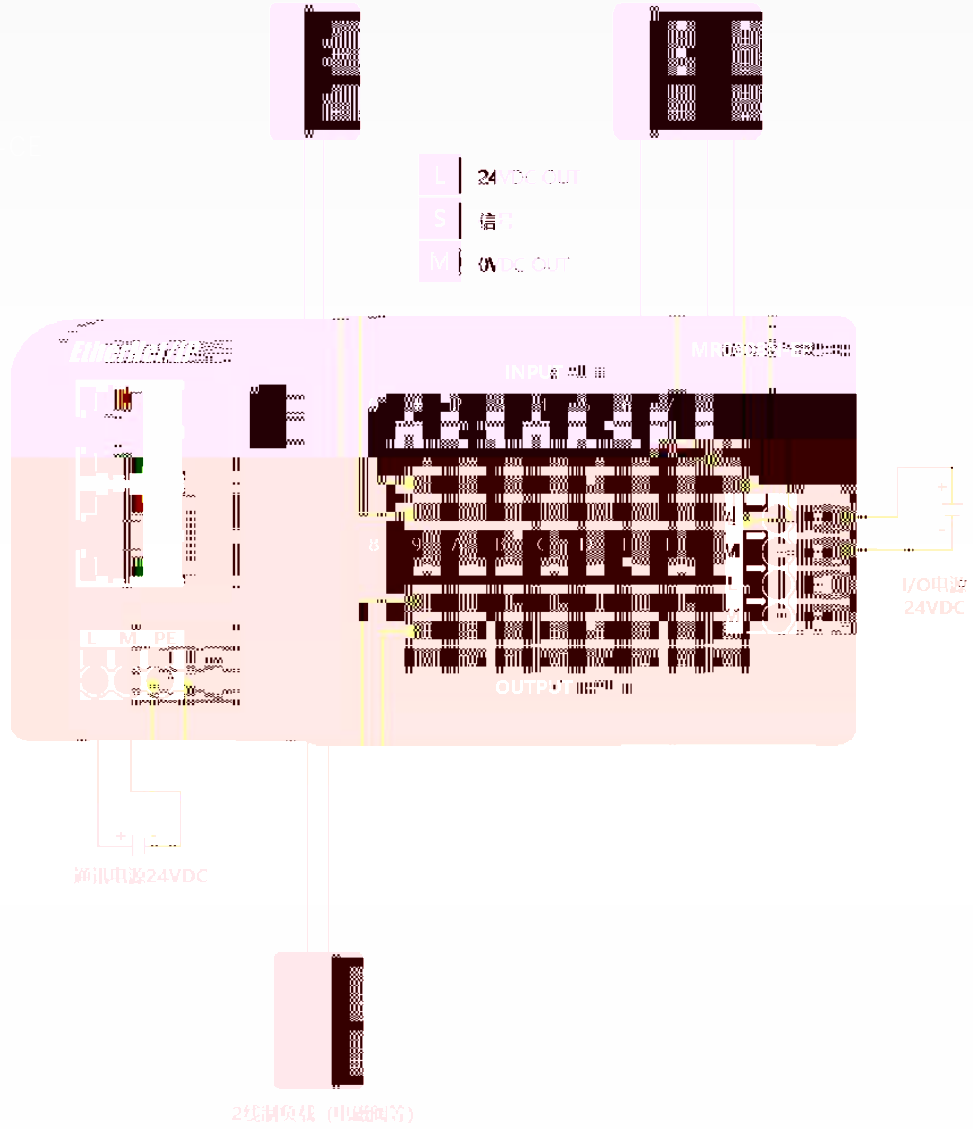


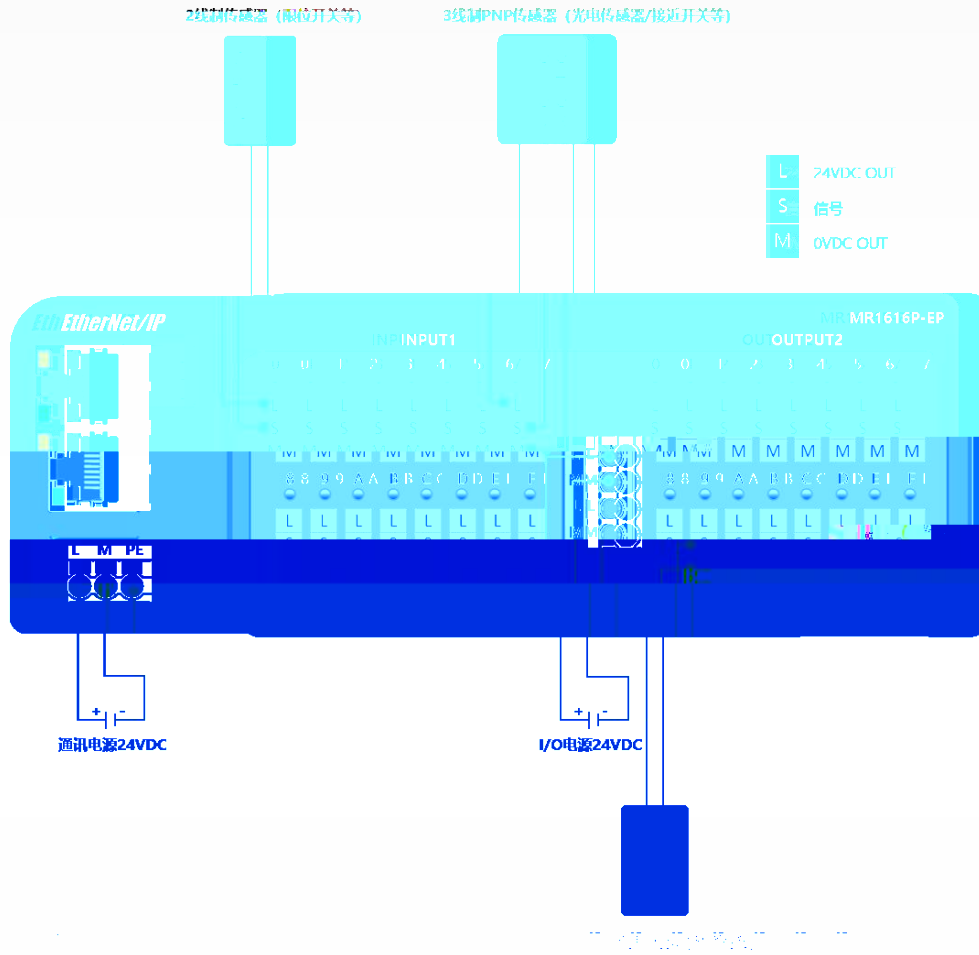

16 16 PNP


2线制传感类 (限位开关等)

2线制NPN传感类 (光电传感器/接近开关等)

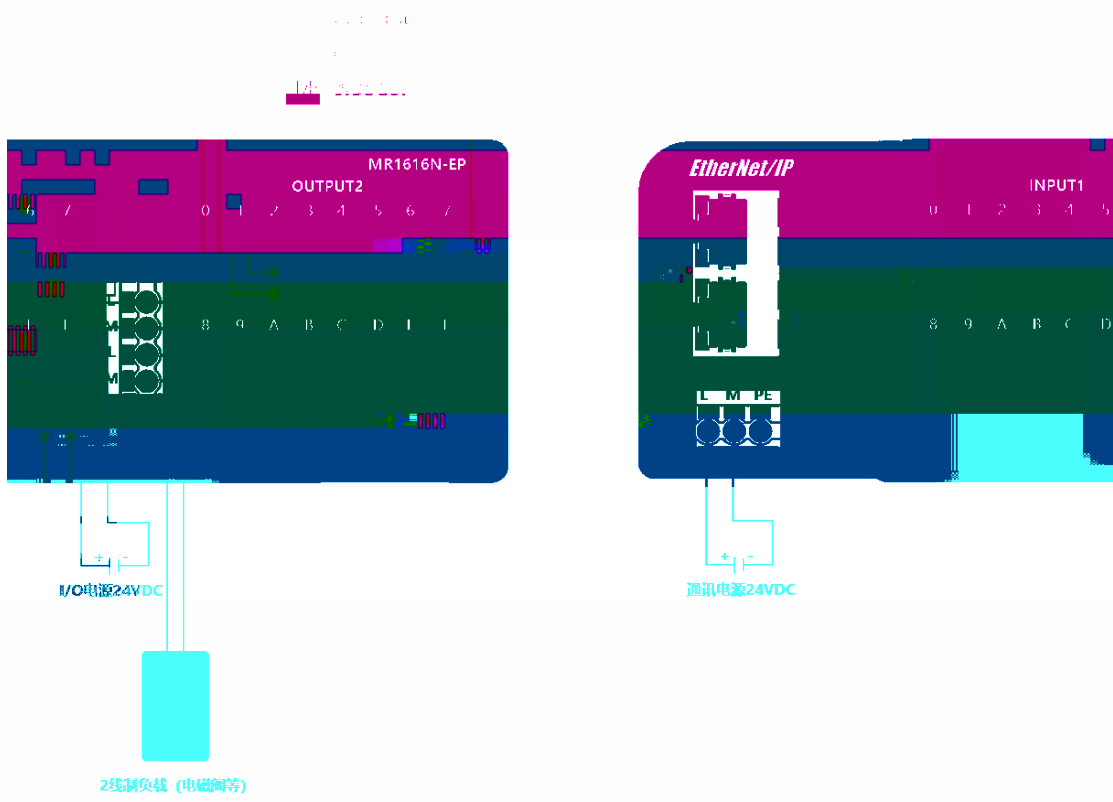


## 4.2 e-CON


### 4.2.1 e-CON

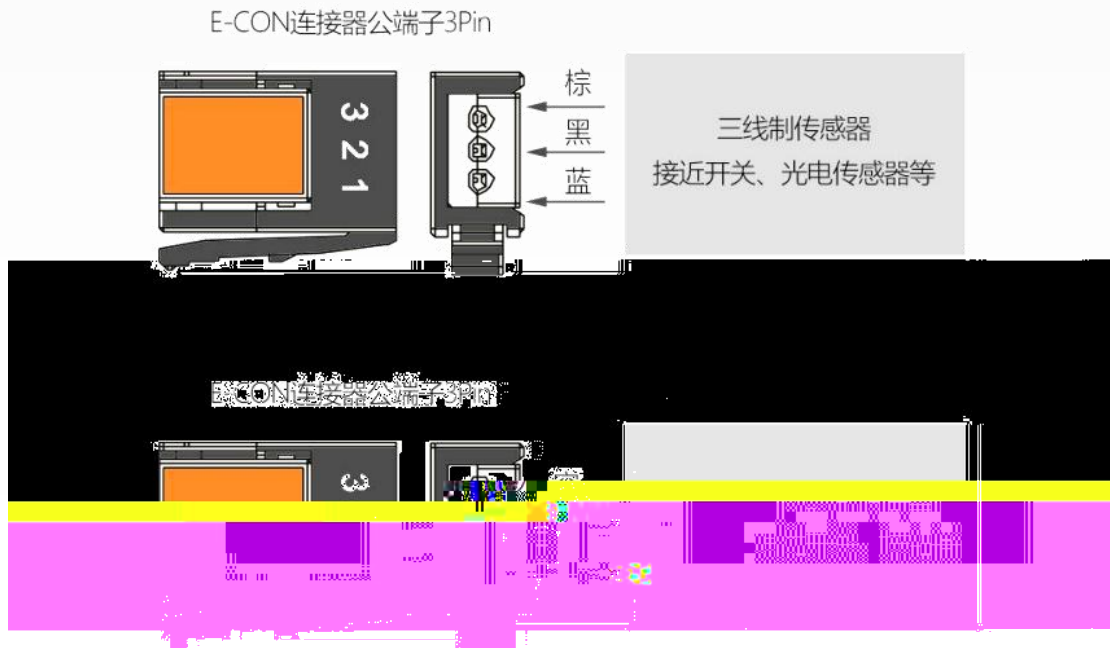


E-CON连接器公端子3Pin

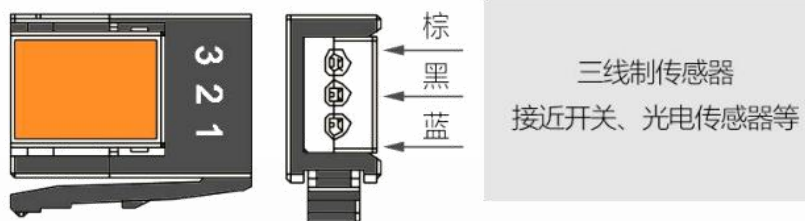


E-CON连接器公端子3Pin

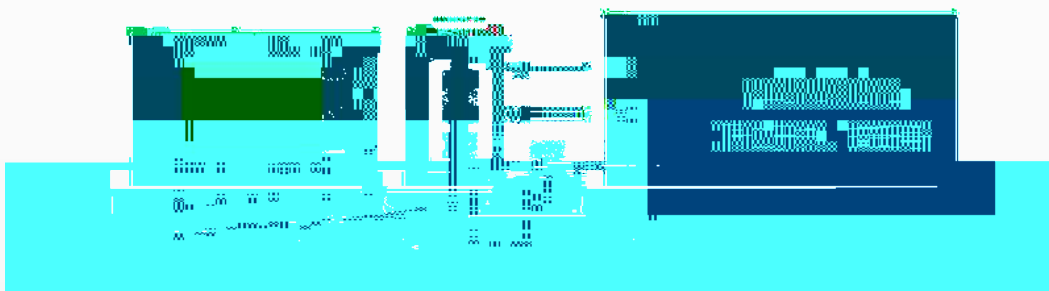

E-CON连接器公端子3Pin

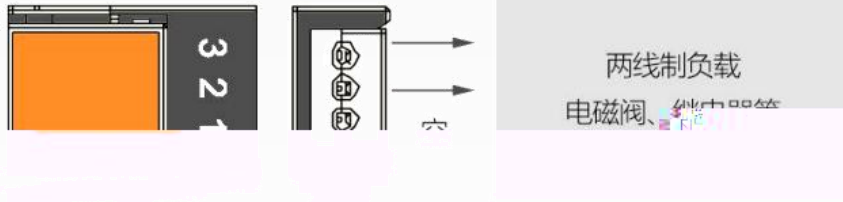

E-CON连接器公端子3Pin

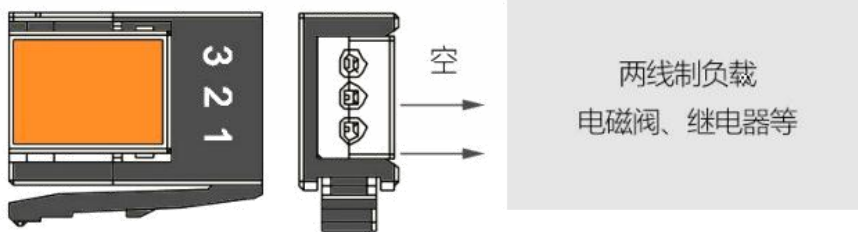

### 4.2.2 e-CON




方拉RR设计



如选型不匹配会影响接线效果，导致信号失真，务必仔细核对！

外形	压接颜色	线缆外径 (mm)	导线规格
03P-OC	棕色	12-16	AWG22-24 0.32-0.50mm
03P-GN	绿色	10-12	
03P-BL	蓝色	12-16	
03P-GY	灰色	16-20	

### 4.3

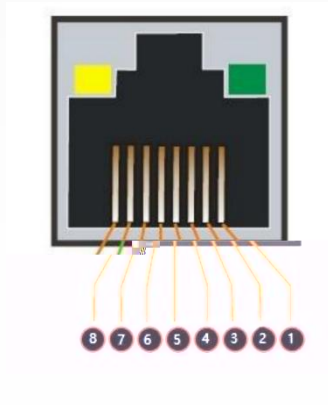

### 5 Ethernet/IP



### 4.4 LED

#### 4.4.1

ERR(	RUN( )	PWR(	

6




#### 4.4.2 I/O

## 4.4.3 RJ45

LINK1/LINK2	ACT1/ACT2	
○		
●		
	○	
	●	

7 RJ45

## 4.5

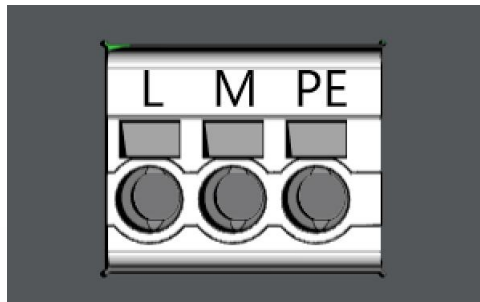

L	
M	
PE	



4.6


4.7






5.



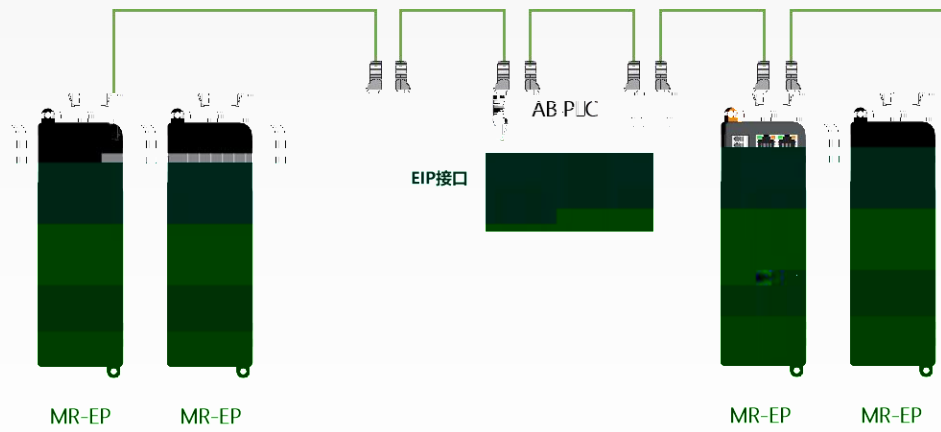

6-2 EtherNet/IP

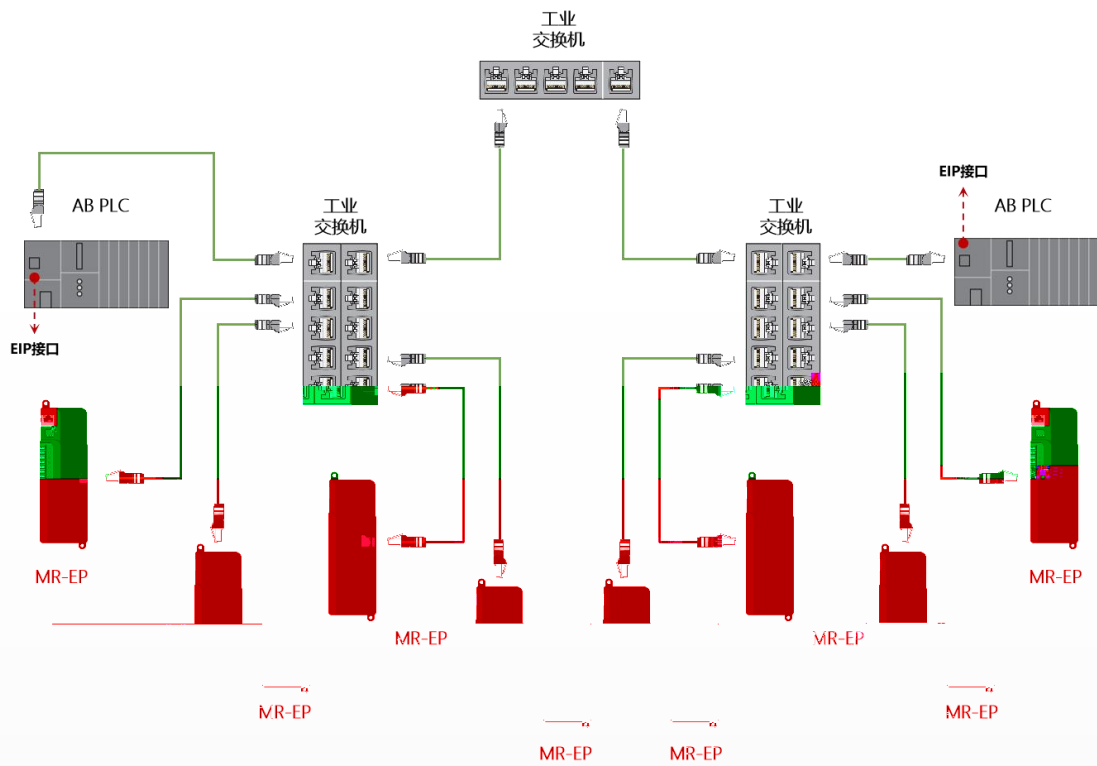

6-3 EtherNet/IP




## MR1600X-EP



## MR3200X-EP




MR0808X-EP







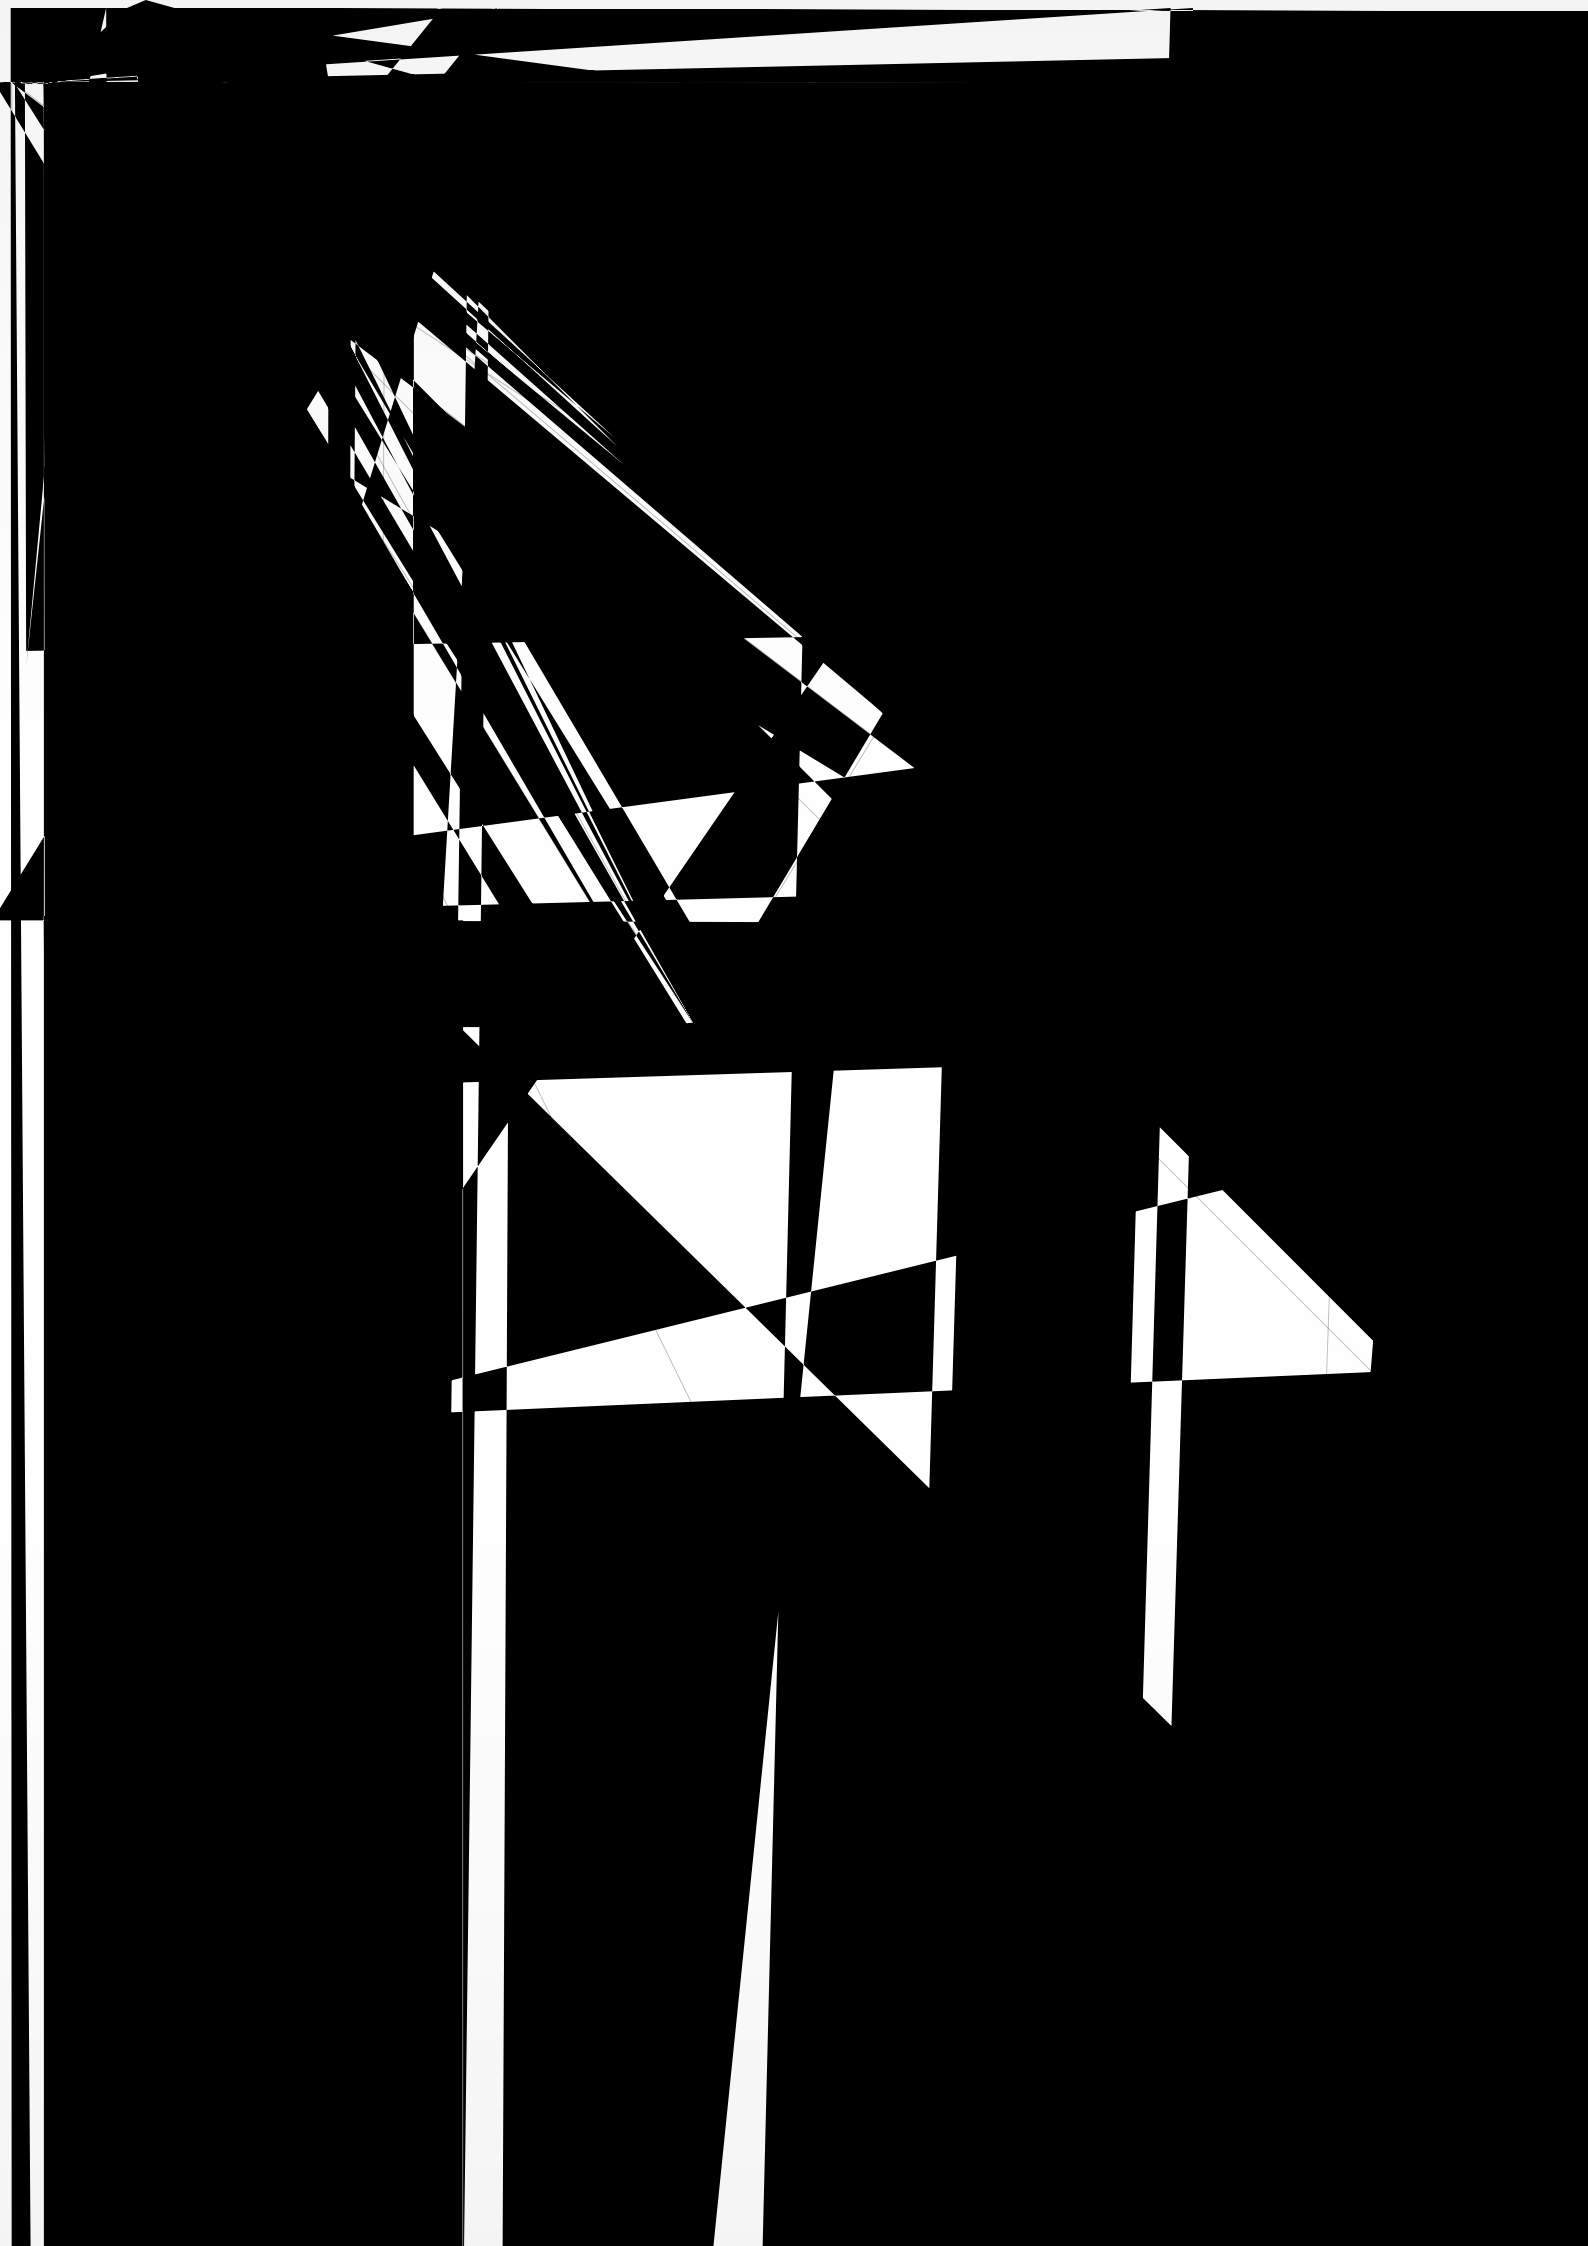



0510-85888030